




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01R 19/15	A1	(11) International Publication Number: WO 99/23497 (43) International Publication Date: 14 May 1999 (14.05.99)
(21) International Application Number: PCT/GB98/03296 (22) International Filing Date: 4 November 1998 (04.11.98) (30) Priority Data: 9723164.1 4 November 1997 (04.11.97) GB (71)(72) Applicant and Inventor: GARDNER, Robert [GB/GB]; 3 Heol-y-Bryn, Barry, South Glamorgan CF62 6SY (GB). (74) Agents: LAINE, Simon, James et al.; Wynne-Jones, Laine & James, Morgan Arcade Chambers, 33 St. Mary Street, Cardiff CF1 2AB (GB).	(81) Designated States: CA, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: IMPROVEMENTS RELATING TO CURRENT INDICATORS

(57) Abstract

A current detector/indicator for DC has a transistor (1) and an LED (2). They are arranged so that current flow through the LED causes the transistor to conduct, shunting excess current away from the LED and through the transistor. For AC, the circuit can be doubled, with transistors and LEDs arranged with inverse polarity. A triac (15) may supplant the two transistors, with parallel, opposed LEDs (16) in its gate circuit.

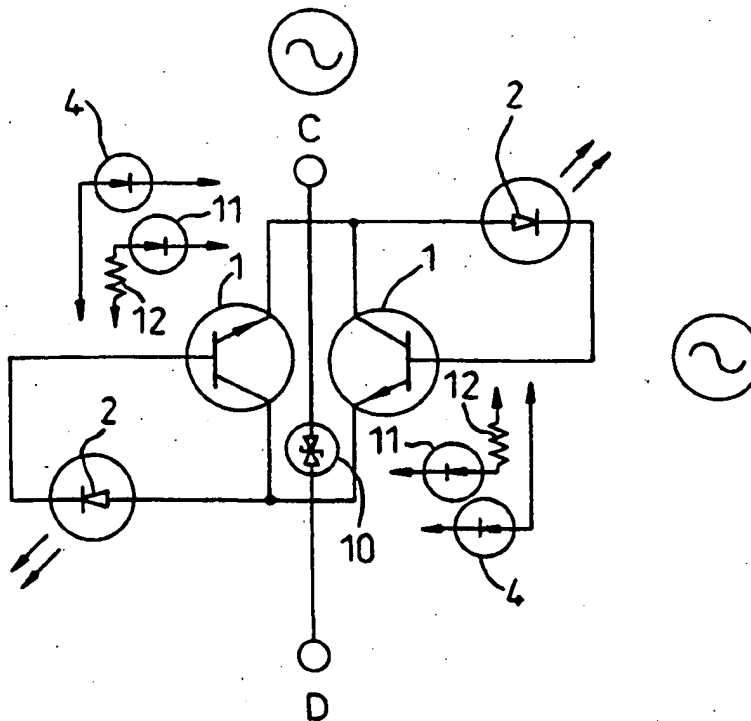

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NI	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

IMPROVEMENTS RELATING TO CURRENT INDICATORS

This invention relates to current detector/indicators and in particular to improved current detector/indicators such as can be utilised by modern control systems as a means to facilitate rapid fault assessment and status of loop circuit integrity while providing circuit isolation. In other words, it is aimed at testing electrical contacts for mechanical and electrical function without breaking power to external circuits. Many uses are envisaged for this device but in particular there is the ability to supply visible information on whether a current is flowing in a circuit or not and to supply an isolated switched output of that information.

Light emitting diodes are excellent devices to indicate current flow but are generally limited in their current capacity to a maximum of 100mA and are very prone to damage from reverse voltages of low magnitude. They exhibit extremely long life if subject to their design ratings of current and voltage and consume little. In this specification, it should be understood that as well as 'ordinary' LEDs, such as are used in many indicators, it would also be possible to use laser diode type LEDs.

According to the present invention there is provided a current indicator comprising a transistor and an LED in circuit therewith and arranged to have a controlling influence thereon, current flow through the LED energising it and thereby causing the transistor to conduct and shunt excess current away from the LED and through the transistor.

In a preferred, simple form for indication of DC or one polarity of AC, there is one transistor and the LED is connected across its collector and base. The LED can be part of an opto-isolator capable of providing a remote
5 indication of current flow, in which case another LED in circuit with the transistor might be arranged to be energised when the transistor is conducting, thereby to provide local indication of current flow. This other LED can be connected across the emitter and collector.

10 For indicating both polarities of AC, the indicator can be doubled with two transistors connected in inverse parallel.

In another convenient form the transistor is a triac in an AC power line which may pass current selectively full
15 wave or either half wave, and wherein there are two LEDs, in parallel with reversed polarities, in the triac's gate circuit arranged to trigger the triac into conduction when power is on the line, each LED being energised with the gate trigger current during the associated half wave conduction
20 through the triac but extinguishing when the triac avalanches into conduction.

Again, each LED can be part of an opto-isolator capable of providing a remote indication of current flow, in which case another LED in series with each first LED may provide
25 local indication of current flow.

Whenever there are two LEDs for visible indication of current they may be combined into a bi-colour LED, AC being indicated by a mixture of the colours. More usefully, four

different conditions may be delivered via two wires by way of two switches isolated by two inversely polarised diodes.

PNP and NPN transistors are usable, and where doubled two of the same type may be used, or complementary PNP and
5 NPN transistors.

Preferably, the or each transistor will have reverse voltage protection, for example by a diode across the collector and emitter.

In one arrangement, a load may be energised through a
10 power diode, across which is connected the emitter and base of a transistor, the collector being connected through the LED to the other side of the load. There could be two LEDs in parallel or series, one being for local indication and the other being part of an opto-isolator. It is important
15 that the power diode and the transistor share a common thermal environment for reliable operation.

For a better understanding of the invention, some embodiments will now be described, by way of example, with reference to the accompanying drawings, in which:

20 Figures 1 to 11 and Figures 13 to 15 are circuit diagrams of current indicators, and

Figure 12 shows a waveform associated with Figure 11.

In each of Figures 1 to 3, there are two versions of the circuit, one with an NPN transistor, the other with a
25 PNP transistor. They each work in a similar fashion and will be described as one circuit.

A basic current indicator is shown in Figure 1 and consists of a transistor 1 and an LED 2 coupled across the

collector and base of the transistor, which is between terminals A (positive) and B (negative).

A resistor 3 or diode 4 between the base and emitter of the transistor 1 can enhance the sensitivity of the device, but neither is essential to its working. They are therefore not illustrated with definite connections, but the arrows indicate their position, if used. The polarity of the diode 4 matches that of the transistor junction.

When conducting, the voltage drop V_f across the base-emitter junction of the transistor is typically 0.6 V while the forward voltage of the LED varies with colour and type between 1.0 V for infra-red types to 4.0 V for certain colours. The voltage drop that appears across terminals A and B when there is current flow is the sum of the transistor emitter-base V_f plus that of the LED and will therefore be of the order 1.6 to almost 5 V.

With terminal A positive in relation to terminal B, the LED 2 will pass current through the base-emitter junction of the transistor 1 and force the transistor into collector-emitter conduction. This diverts current from the LED, which is typically limited to a maximum capacity of 100mA.

The circuit will control the voltage drop across itself and of course the presence of current is indicated by the illumination of the LED.

Figure 2 is essentially the same as Figure 1, but with the addition of a diode 5 across the transistor oriented to provide reverse volts protection. LEDs are very prone to damage from reverse voltage even of low magnitude.

Figure 3 extends this arrangement in two respects. First there is another LED 6, in series with a resistor 7, in parallel with the diode 5 across the transistor. The resistor 7 will be of the order of 10 ohms and serves to control the current in the LED 6, which will illuminate when current flows from A to B and serve as a local indicator.

The LED 2, however, is now part of an opto-isolator 8, and when conducting and radiating it will produce an output at 9 which can be fed to a remote station.

10 These circuits are useful for DC or where there is interest only in one polarity of an AC current. An arrangement for detection or indication of AC across terminals C and D is shown in Figure 4, using NPN transistors. A PNP version is equally possible or a combination of PNP and NPN transistors. Figure 4 is essentially a doubling of Figure 2, with similar transistors 1 connected in reversed polarity arrangement, collectors to emitters, with their associated LEDs 2 as in Figure 2, and with the diodes 5 combined into a transient suppressor 10.

20 It will be appreciated that the LEDs illuminate alternately in synchronism with the half cycles of the AC and enable four different conditions to be indicated by different combinations of light.

For improved sensitivity a single diode 4 may be connected between the base and emitter of each transistor, as in previous figures, or a diode 11 and resistor 12 in series, as illustrated. The diode provides a minimal current path for the associated LED without turning the

transistor on, but enough to exploit the minimum current illumination of the LED, which may be of the order of 0.5 mA.

Figure 5 shows a combination of the circuits of Figures 3 and 4. The LEDs 2 each form part of an opto-isolator 8 as in Figure 3, while instead of two separate LEDs 6 and separate resistors 7, these can be merged into a single bi-colour LED 13 and a single resistor 14 in parallel with the transistors. The different colours will illuminate alternately, but with anything other than very low frequencies they will appear as two side by side continuous colours when AC is present.

Instead of two separate transistors a triac 15 may be used as shown in Figure 6. Its gate stimulation is via two inversely connected LEDs 16, and here they are used to detect and relay information on two different loads 17 which, with associated diodes 18 (inversely arranged) and switches 19, are in parallel in the power circuit. Only two wires are necessary, thereby reducing wiring costs to both input and output circuits of a control system. The LEDs 16 each serve in turn to pass current to the triac gate until the triac switches on. Thereafter the triac 15 assumes the full load current (LED turns off) with its V_f falling to less than one volt (insufficient to maintain an LED "on") until the supply passes through the 0 volt part of its supply curve.

This routing of the gate current for the triac 15 through two inversely polarised LEDs 16 causes it to trigger

into conduction at a point determined by the V_f of the LED and the polarity of each half cycle. Because the supply is an alternating current they will light at a frequency determined by the supply frequency but 180 degrees opposed.

5 Together they effectively double the supply frequency. The LEDs mirror the action of the switches 19 and illuminate to indicate whichever or both switches are passing current.

An alternative isolated system can be realised to act as a feedback to the control system as shown in Figure 7, 10 utilising opto-isolators 20 instead of visible LEDs.

The systems of Figures 6 and 7 could be combined as shown in Figure 8, where the parallel branches in the gate circuit each have an LED 16 and an opto-isolator 20.

Figure 9 shows a PNP transistor 21 and an NPN transistor 22 with collectors to terminal C and emitters to terminal D. A transient suppressor 23 and LEDs 24 and 25 with inverse polarity and each with a series resistor 26 are in parallel across these terminals. Across the base and collector of each bi-polar transistor there is a MOS-FET, 20 the PNP transistor 21 having an N-channel device 27 and the NPN transistor 22 having a P-channel device 28. Their gates are photo coupled to respective LEDs 29 and 30 of opposite polarity across the terminals C and D, each in series with a resistor 31. Whichever LED 29 or 30 is conductive 25 illuminates and switches on the associated MOS-FET 27 or 28, which in turn makes the associated bipolar transistor 21 or 22 conductive.

Figure 10 can be regarded as a simpler version of

Figure 9 and corresponding parts are similarly referenced. Two NPN transistors 32 and 33 are connected across terminals C and D with reverse polarity and the associated LEDs 29 and 30 photo couple directly to the bases of these bipolar devices.

Figure 11 shows the circuit of Figure 4 (less the transient suppressor) across an inductor 34 which is energised with alternating positive and negative pulses of low voltage (less than one volt) but significant current, as shown by the full lines of Figure 12. In this case, the LEDs 2 will light out of phase with the actual current in the inductor 35, over the periods indicated by the dotted lines in Figure 12. They will be energised by the collapsing magnetic field generating a reverse current. The LEDs 2 therefore indicate that a current has just been present in the inductor.

All the above circuits are intended to be inserted into a current carrying conductor and to derive their power for operation from the line. Adequate precautions will be taken to protect the devices against current overload and transient voltage spikes.

In Figure 13 a simple DC arrangement is shown where the load 36 is energised through a power diode 37 with a reverse volts protection diode 38 in parallel. A PNP transistor 39 has its emitter connected to the positive (terminal A) side of the diodes and its base to the load side. The collector circuit has an LED 40 and resistor 41 in parallel with an opto-isolator 42 and resistor 43, both connected to the zero

volts terminal B.

The voltage drop across the power diode 37 when the load is carrying current makes the transistor 39 conductive and generates a response in the LED 40 and from the opto-isolator 42. A variable resistor 44 of 0.6 to 600 ohms could be included across the diodes 37 and 38 as shown as a means of establishing an adjustable threshold for the LEDs to illuminate at different current levels. Any lack of integrity of the load circuit will indicate locally and feed back to a remote station.

Figure 14 shows a generally similar circuit but with the LED 40 in series with the opto-isolator 42, and with a single resistor 45.

Similar arrangements are possible using an NPN transistor.

The indicator of Figures 13 and 14 require that the return power line is close at hand to power the L.E.D. and that the arrangement can tolerate another circuit path shunted elsewhere without degrading the information in that circuit.

Figure 15 shows a further circuit suitable for use when "intrinsically safe" regulations apply. This is where power to the field circuits is mandatorily low, negating the need for power transistors but exploiting the ability of the device to interpret four bits of information from two wires.

Between terminals A and B to which AC is applied there is a bi-colour LED 46 in series with two opto-isolators 47 in parallel, their LEDs being arranged with inverse

polarity. The circuit continues beyond terminal B to a double switch assembly 48 and 49 with associated diodes 50 and 51.

The switches may be coupled to some device such as a valve, and in the position shown this valve is in an intermediate position, neither open nor closed. Both parts of the LED 46 will be on, and both opto-isolators energised.

If the valve is fully opened, the upper switch 48 closes, bringing the diode 50 into circuit. The corresponding part of the LED 46 and one of the opto-isolators 47 will be on. Likewise, if the valve is fully closed, the lower switch 49 closes and the other part of the LED 46 and the other opto-isolator 47 will be on.

If there is no illumination from the LED, there must be a fault.

This arrangement can be applied to the circuits of Figures 4, 5, 9, 10 and 11.

Whilst the invention has been described above, it extends to any inventive combination of the features set out in the introduction or the description.

CLAIMS

1. A current indicator comprising a transistor and an LED in circuit therewith and arranged to have a controlling influence thereon, current flow through the LED energising it and thereby causing the transistor to conduct and shunt excess current away from the LED and through the transistor.

2. A current indicator as claimed in Claim 1, wherein the LED is connected across the collector and base of the transistor.

10 3. A current indicator as claimed in Claim 2, wherein the LED is part of an opto-isolator capable of providing a remote indication of current flow.

4. A current indicator as claimed in Claim 3, and further comprising another LED in circuit with the transistor and arranged to be energised when the transistor is conducting, thereby to provide local indication of current flow.

5. A current indicator as claimed in Claim 4, wherein said other LED is connected across the emitter and collector of the transistor.

6. A current indicator as claimed in any preceding claim, wherein the indicator is doubled with two transistors connected in parallel and with reversed polarities.

7. A current indicator as claimed in Claim 1, wherein the transistor is a triac in an AC power line which may pass current selectively full wave or either half wave, and wherein there are two LEDs, in parallel with reversed polarities, in the triac's gate circuit arranged to trigger

the triac into conduction when power is on the line, each LED being energised with the gate trigger current during the associated half wave conduction through the triac but extinguishing when the triac avalanches into conduction.

5 8. A current indicator as claimed in Claim 7, wherein each LED is part of an opto-isolator capable of providing a remote indication of current flow.

9. A current indicator as claimed in Claim 8, and further comprising another LED in series with each first LED
10 to provided local indication of current flow.

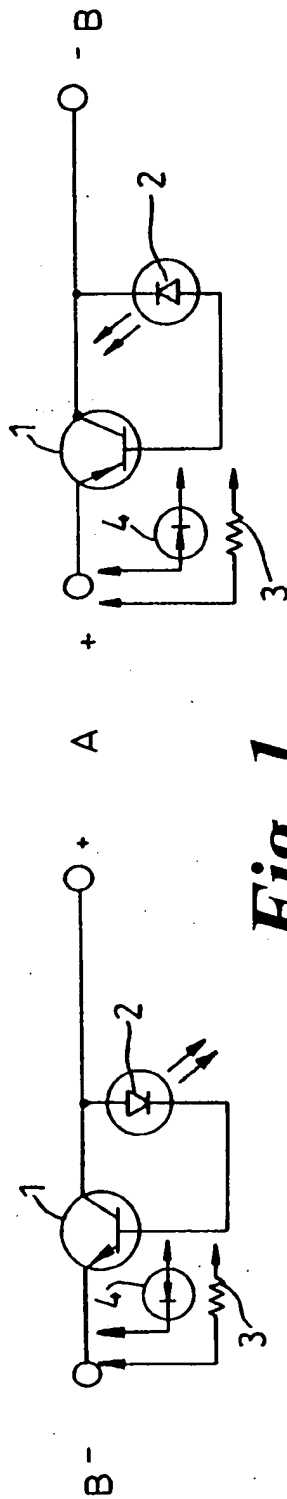


Fig. 1

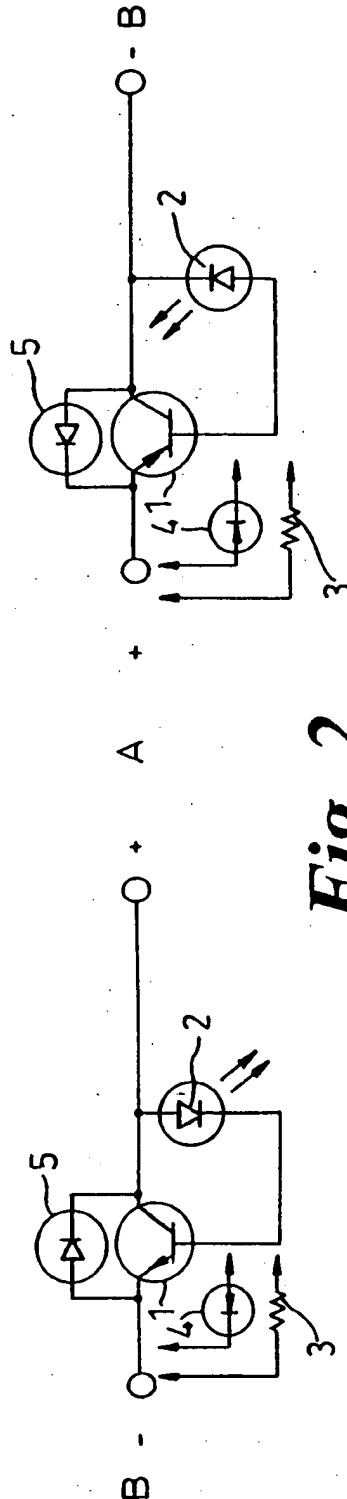


Fig. 2

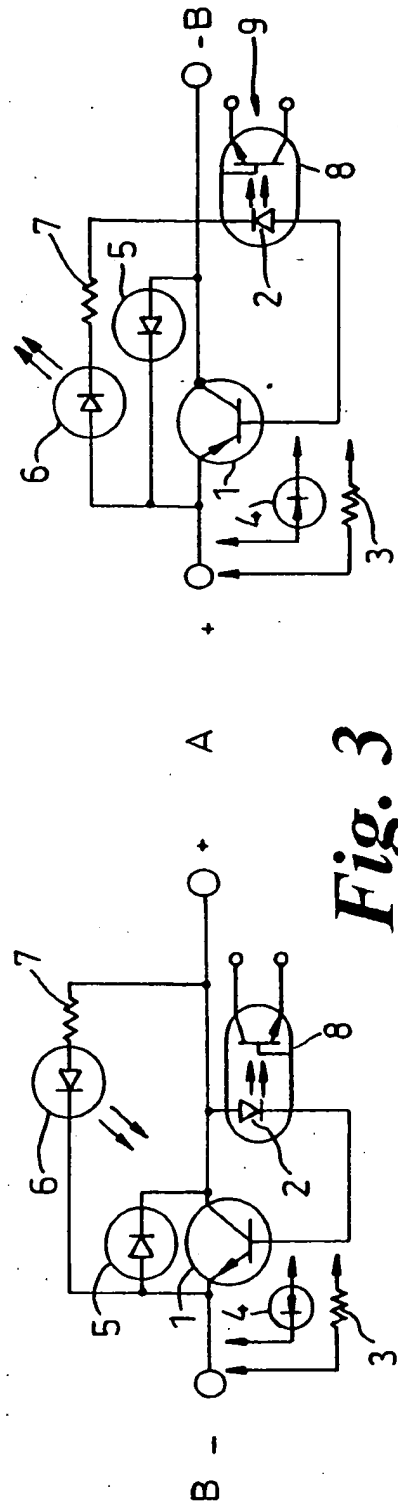


Fig. 3

2/7

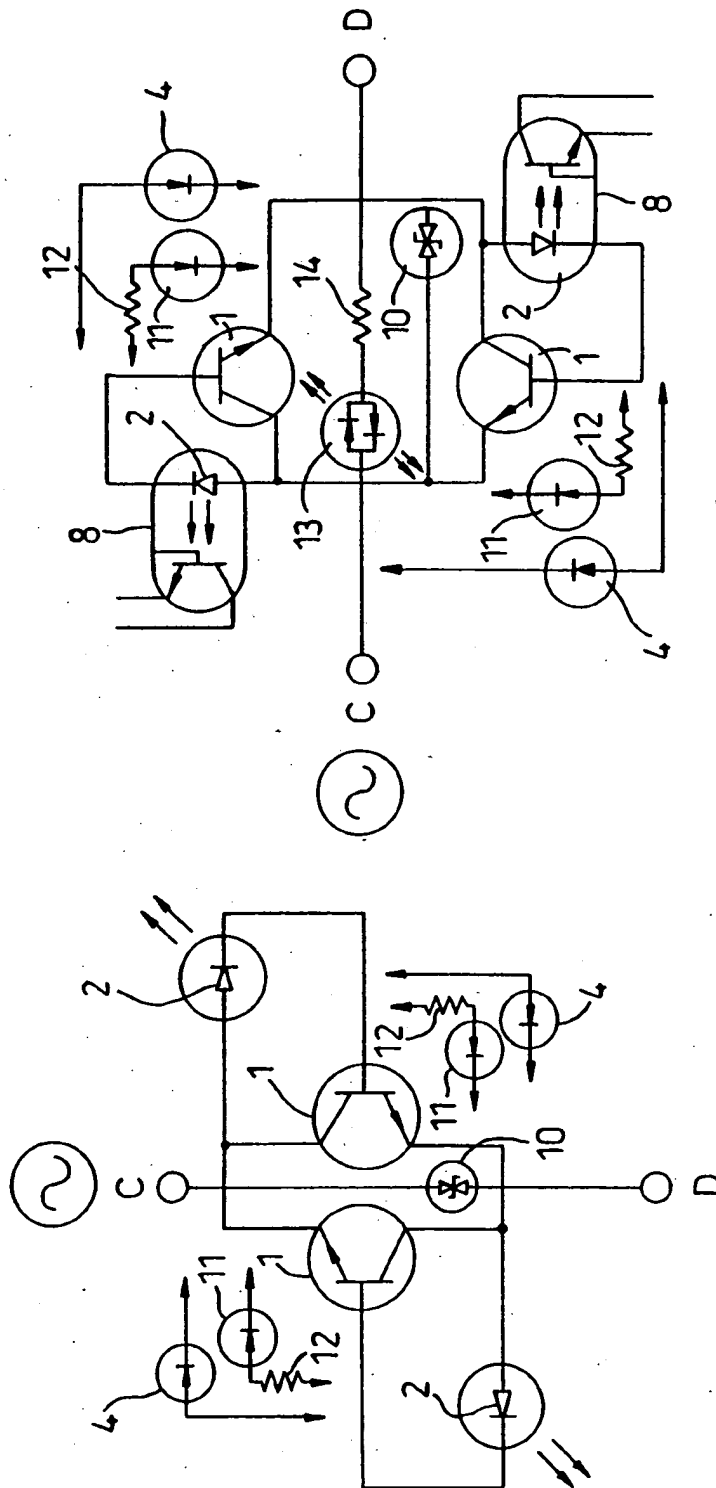
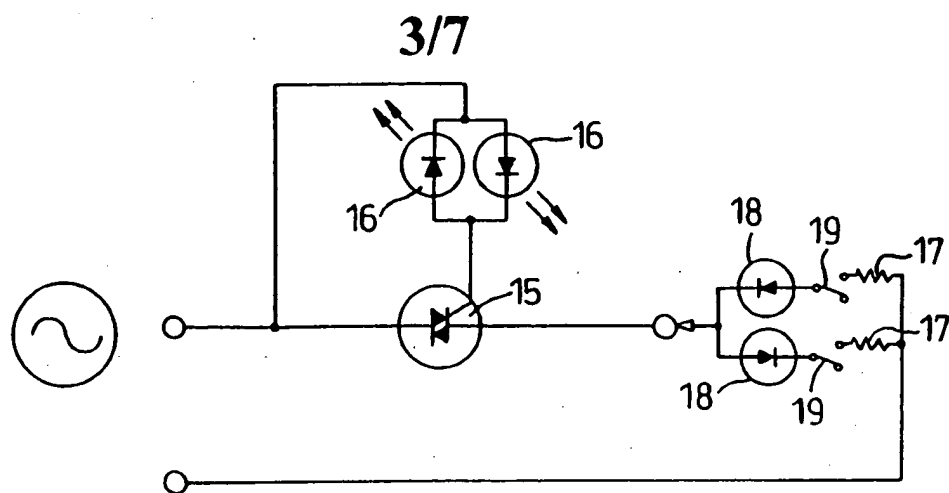
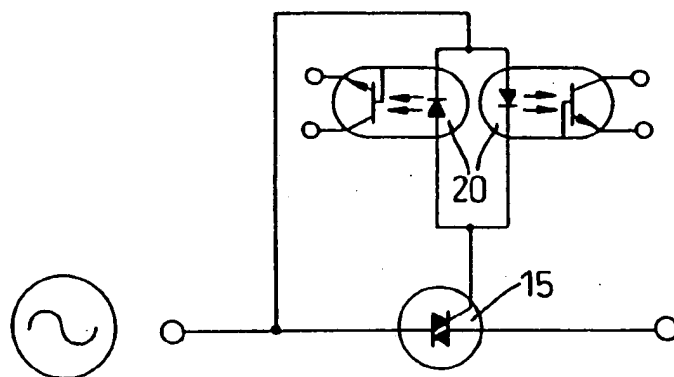
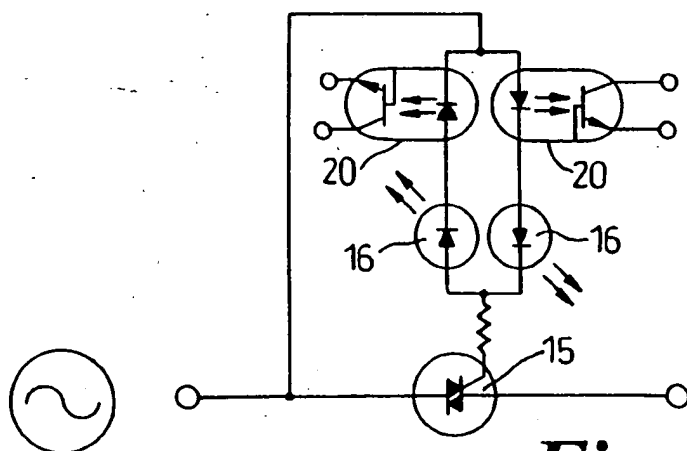


Fig. 5

Fig. 4

**Fig. 6****Fig. 7****Fig. 8**

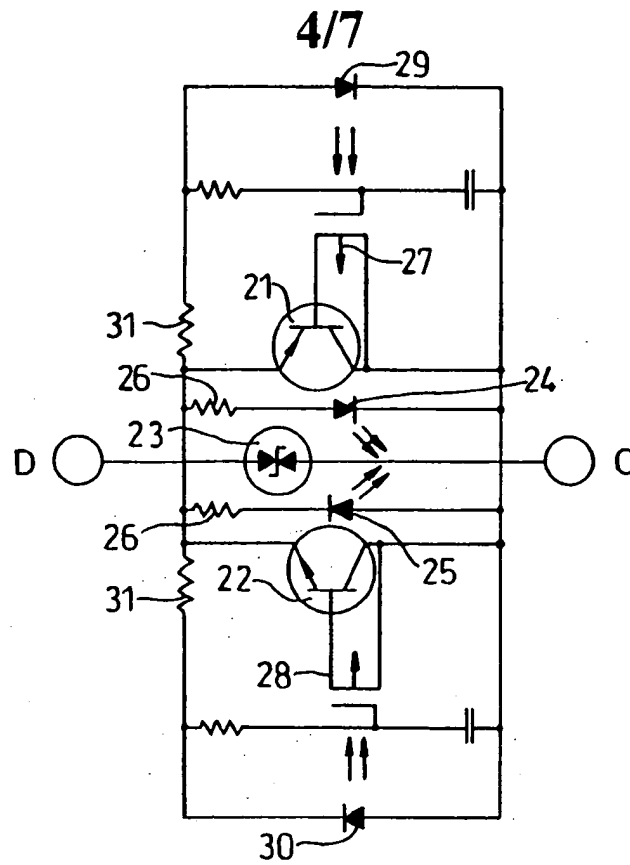


Fig. 9

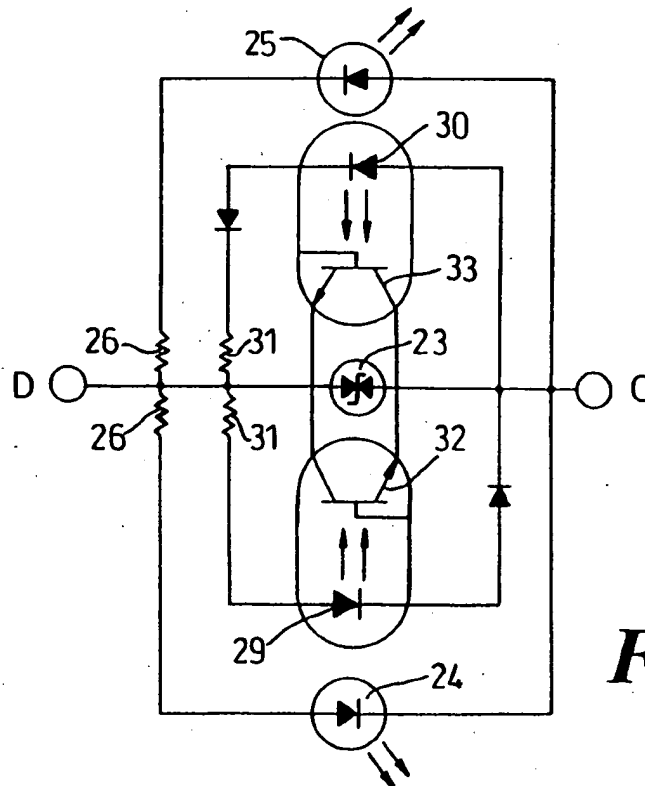
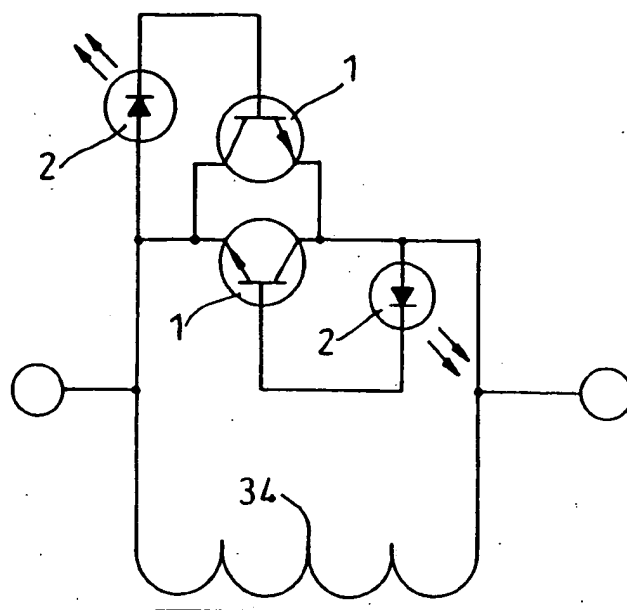
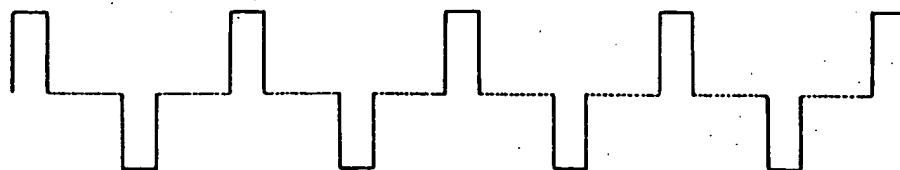




Fig. 10

5/7

***Fig. 11******Fig. 12***


SUBSTITUTE SHEET (RULE 26)

6/7

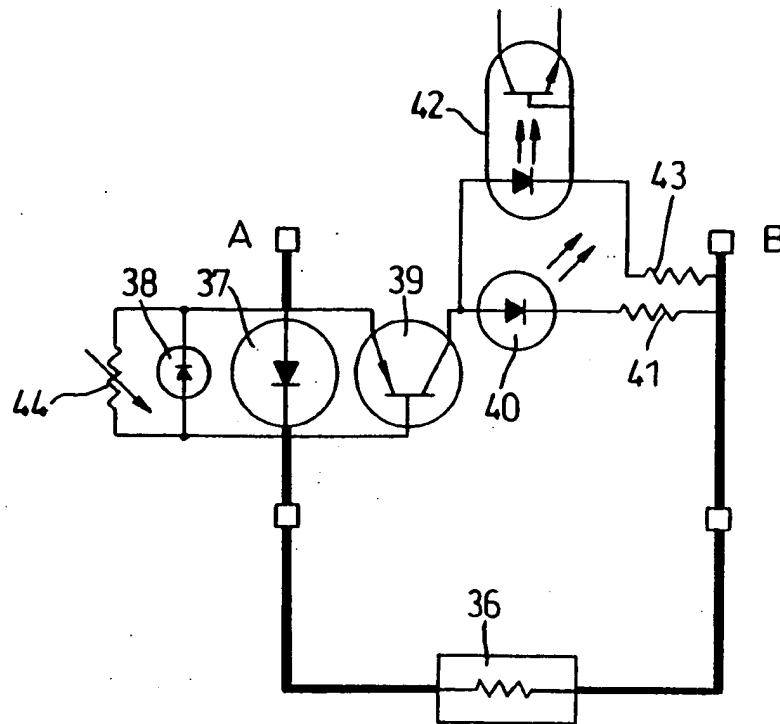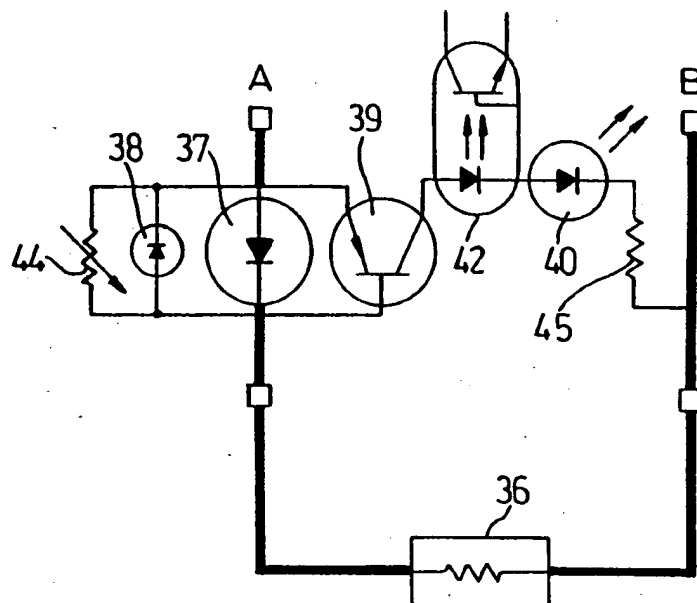*Fig. 13**Fig 14*

SUBSTITUTE SHEET (RULE 26)

7/7

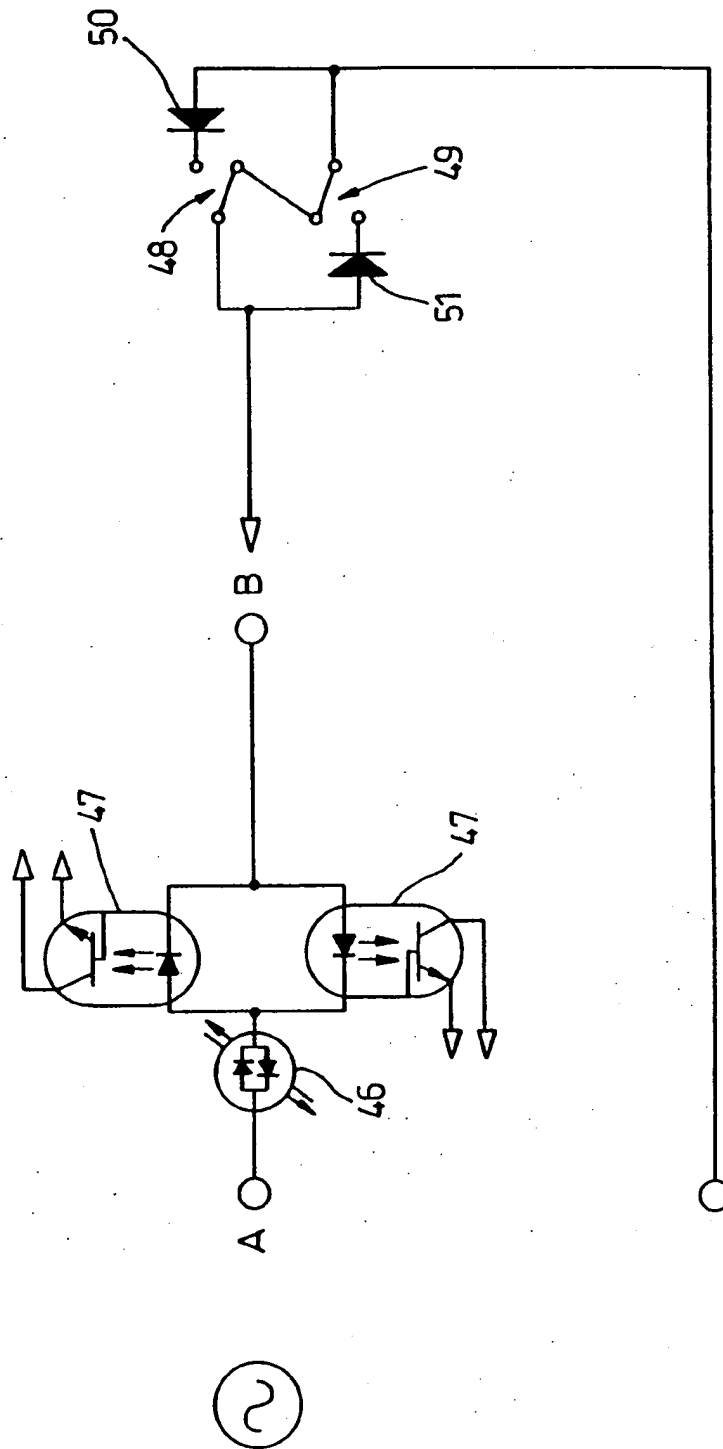*Fig. 15*

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/03296

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G01R19/15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01R H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 535 928 A (LABO CENT TELECOMMUNICAT) 11 May 1984 see page 2, line 27 - page 3, line 22; figure 1	1-3,6
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 670 (P-1845), 16 December 1994 & JP 06 265585 A (MITSUBISHI HEAVY IND LTD), 22 September 1994 see abstract	1-3
X	PATENT ABSTRACTS OF JAPAN vol. 015, no. 088 (P-1174), 4 March 1991 & JP 02 304372 A (NEC CORP), 18 December 1990 see abstract	1-4



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

24 February 1999

Date of mailing of the international search report

04/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Hijazi, A

INTERNATIONAL SEARCH REPORT

Int. Patent Application No.
PCT/GB 98/03296

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>PATENT ABSTRACTS OF JAPAN vol. 015, no. 047 (P-1162), 5 February 1991 & JP 02 281307 A (OMRON TATEISI ELECTRON CO), 19 November 1990 see abstract</p> <p style="text-align: center;">-----</p>	1,7-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/03296

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
FR 2535928 A	11-05-1984	NONE	